Project:_____

Location:_____

Item #:_____Quantity:_____

Model #:_____

MODEL: IMD-ERC36B

MERCHANDISERS: Glass Door Merchandiser ERC Series.

Benefits

- ✓ Use of environmentally friendly **R290 hydrocarbon** refrigerant and electronic fan motors for an improved energy efficiency.
- ✓ ***Lighting.*** LED lighting reduces the energy consumption and provides more lighting in the cabinet.
- ✓ ***100% Tested.*** All condenser units are 100% tested, in helium chambers for refrigerant leak detections.
- ✓ ***Certified.*** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety).

ERC 36B

MODEL	Dimensions (inches) (mm)			Nº Doors	Nº Trays	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (ºF) (ºC)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IMD-ERC36B	24-3/8 620	25-5/8 595	73-3/8 1870	1	4	R290	0.26 120	39ºF /46ºF +4ºC / +8ºC	10.59 355	1/3	5A	154 70

Revision: 01 Date: 05/08/2019 IMD-ERC36BF_FT_62_1

Infrico USA Corp.
1409 N.W. 84th Avenue
Doral, FL 33126
1.305.777.9599 Office
1.305.777.9598 Fax

www.infrico.us
sales@infrico.com

APPROVALS: _____

AVAILABLE AT: _____

Project:_____

Location:_____

Item #:_____Quantity:_____

Model #:_____

MODEL: IMD-ERC36B | **MERCHANDISERS: Glass Door Merchandiser ERC Series.**

STANDARD FEATURES

Exterior

- Plastic coated steel exterior.
- Compact structure totally injected.

Interior

- Plastic coated steel interior.
- LED lighting..

Insulation

- Insulation by free CFC's polyurethane, foam high-pressure injected with density 40 Kg/m^3.
- Zero ODP and Low GWP.

Doors

- Doors with double pane glass (6-15-5).

Shelves

- (4) inner shelves (ERC36B).
- Inner shelves dimensions: 350x525 mm.
- Brackets and shelves easily removable for cleaning.

Refrigeration

- Temperature and defrost regulated by a digital controller.
- Ventilated condensation system.
- Forced evaporation system.
- No electric tray.
- Evaporators treated with anti-corrosion polyester Epoxy.
- Climatic class 4 (30ºC, 55%RH).
- R290 Refrigerant

Electrical

- Electrical connection: NEMA 5-15P.

OPTIONAL

- ✓ Additional shelves
- ✓ Electrical connection 220 V / 1 ph / 60 Hz.
- ✓ Electrical connection 220 V / 1 ph / 50 Hz.

PLAN VIEW

ELEVATION



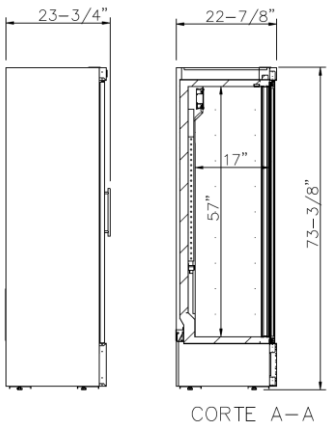

PLAN VIEW



Revision: 01 Date: 05/08/2019 IMD-ERC36BF_FT_62_1

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

Infrico USA Corp.
1409 N.W. 84th Avenue
Doral, FL 33126
1.305.777.9599 Office
1.305.777.9598 Fax

www.infrico.us
sales@infrico.com

APPROVALS: _____

AVAILABLE AT: _____