



Project:	
Location:	
Item #:	Quantity:
Model #:	

MODEL: IRT-MR93EN

UNDERCOUNTER: Pizza Prep Tables

General Strengths

- Energy efficiency higher. R290 refrigerant with electric fans and evaporative tray without electric resistances.
- Sanitation. The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ Doors & Drawers. Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in.
- Control systems. Greater ability for the adjustment of temperature range as per the end user's requirements.
- 100% Tested. All condenser units are 100% tested, in helium chambers for refrigerant leak detections.
- Certified. Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)



MODEL	Dimensions (inches) (mm)			Nº Doors	Nº Shelves/	Ref.	Ref. Weight	Temp. Range	Capacity (Cu. Ft.)	Cond. Unit.	Case Amps	Crated Weight
	W	D	Н	/Pans	Lids		(Lbs.) (gr.)	(ºF) (ºC)	(L)	H.P.	115 V.	(Lbs.) (Kg.)
IRT-MR93EN	93-1/4	32-5/8	40-3/8	3 / 13	6/2	R290	0.26	35ºF/41ºF	27	3/4	7.7	690
IK1-IVIK93EIN	2370	830	1025				120	2ºC/5ºC	765			313













www.infrico.us sales@infrico.com

APPROVALS:

AVAILABLE AT:







Project:	
Location:	
Item #:	Quantity:
Model #:	

MODEL: IRT-MR93EN

UNDERCOUNTER: Pizza Prep Tables

STANDARD FEATURES

Exterior

- AISI 304 Stainless Steel Top,
- AISI 430 Stainless Steel.

Interior

- AISI 430 Stainless Steel,
- Internal drain plug for easy cleaning,
- Sealed interior floors and rounded cabinet corners,

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high-density polyurethane insulation,
- Low GWP & Zero ODP effect,

Doors

- Polyurethane insulated doors,
- Self-closing doors with stay open feature,
- Stainless Steel heavy-duty hinges,
- Triple chamber snap in door gaskets for easy removal and cleaning,
- Field reversible doors,
- Door locks,
- Full-height door opening: 21-5/8"x20-5/8" (550x523 mm).

Casters

- 4" diameter casters,
- Locks provided on front set.

OPTIONAL FEATURES

- Set of 6" legs, height adjustable from 5" to 8",
- Electrical connection is: 220-230 V / 1ph / 50 Hz (plug type varies),
- Stainless Steel wire shelves,
- Additional slide kits,
- Single Overshelf,
- Double Overshelf.
- Drawer kit: 25-1/8"x28-3/8"x11-3/4" (638x720x300 mm).

Salad Top

- Stainless Steel insulated lid,
- Top includes 1/3 size polycarbonate food pans, (12 pans),
- Pan divider bars included.
- Removable sanitary polyethylene cutting board included.

Shelving

- (2) Plastic coated wire shelves per section,
- Set of Stainless Steel shelf brackets,
- Easy remove for cleaning,
- Dimensions WxD: 20-7/8"x25-5/8" (GN 2/1) (530x650 mm),
- Compatible with 18"x26" (457x660 mm) sheet pans.

Refrigeration


- Digital temperature controller with automatic defrost system,
- Energy-saving non- electric condensate pan,
- Forced air refrigeration system,
- Extractable condensing unit for easy service,
- Evaporator coil coated with anti-corrosion material 100% Polyester,
- Refrigeration capacity: 2245 Btu/h (14ºF) / 658 W (-10ºC).

Electrical

- Cord and NEMA 5-15P plug.
- Electrical connection is 115V / 1ph / 60 Hz.



ETL Listed to UL471 Standard and Sanitation classified to NSF7.













Infrico USA Corp. 1409 N.W. 84th Avenue Doral, FL 33126 1.305.777.9599 Office

1.305.777.9598 Fax

www.infrico.us sales@infrico.com

APPROVALS:

AVAILABLE AT:












Project:	
Location:	
Item #:	Quantity:
Model #:	

MODEL: IRT-MR93EN


UNDERCOUNTER: Pizza Prep Tables

PLAN VIEW


ELEVATION

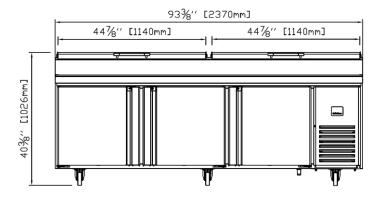

PLAN VIEW

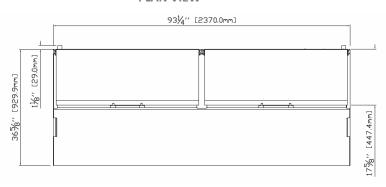

RIGHT VIEW







1.305.777.9599 Office 1.305.777.9598 Fax



APPROVALS:

AVAILABLE AT:













