

Project: _____
 Location: _____
 Item #: _____ Quantity: _____
 Model #: _____

MODELS: PMC3P200922	PMC4P200928	PMC5P200935	Walk-in cooler merchandiser. C-Stores - Supermarket Refrigerators.
----------------------------	--------------------	--------------------	---

General Strengths

- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety).



MODELS	Dimensions (inches) (mm)			Nº Doors Glass	Nº Doors Solid	Capacity (Cu. Ft.) (L)	Temp. Range (°F) (°C)	Recommended Refrig. Capacity (BTU/h)	Cond. Unit. H.P.	Case Amps 115V.	Crated Weight (Lbs.) (Kg.)
	W	D	H								
PMC3P200922	87-13/32 2220	37-3/4 960	89-11/16 2280	3	0	123,24 3490	+32°F/+43°F 0°C/+6°C	5125	-	-	418 190
PMC4P200928	113-13/16 2890	37-3/4 960	89-11/16 2280	4	0	163,50 4630	+32°F/+43°F 0°C/+6°C	8025	-	-	526 240
PMC5P200935	140-5/32 3560	37-3/4 960	89-11/16 2280	5	0	203,76 5770	+32°F/+43°F 0°C/+6°C	10031	-	-	639 290

NOTE: Recommended equipment refrigeration data

*The crated weight corresponds to the weight of the cabinet and the doors.

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 1409 N.W. 84th Avenue
 Doral, FL 33126
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
 sales@infrico.com

APPROVALS: _____ **AVAILABLE AT:** _____

MODELS: PMC3P200922	PMC4P200928	PMC5P200935	Walk-in cooler merchandiser. C-Stores - Supermarket Refrigerators.
----------------------------	--------------------	--------------------	---

CARACTERISTICAS ESTÁNDAR

- **Panels**
 - Sandwich panels composed of polyurethane core, CFC's free and injected at high pressure, with a density of 43-45 Kg / m³, between two sheets of galvanized steel.
 - Thickness of 3 5/32" insulation,
- **Exterior and interior**
 - Galvanized steel (Z 225) with 25μ polyester coating with removable protection film, (white colour RAL 1006 and food grade according to directive 2001/62 / CE (August 9, 2001, amending Directive 90 / 128 / EEC)),
 - Same exterior and interior covering, as well as floor and ceiling,
- **Dimensions**
 - Standard external height 2280 mm,
 - Standard interior height 2120 mm,
 - Width and length according to model,
- **Panel joining system**
 - Specially designed box to fix the panels in a fast and easy way, made of high resistance ABS plastic and galvanized steel hook,
- **Doors**
 - Silver anodized aluminum frame,
 - Triple-pane glass tempered exterior glass, safe against possible breakage by impact,
 - Magnetic door gasket to ensure tightness,
 - Elements for lighting integrated in profiles,
 - Fluorescent lighting (option LEDs),
 - Door frame heaters to prevent external condensation,
- **Accessories**
 - Food grade PVC sanitary radius on all interior edges to facilitate cleaning tasks,
- **Electrical**
 - Electrical connection: 115 V / 1 ph / 60 Hz

OPTIONAL

- ☐ Led lighting in glass doors.



Project: _____

Location: _____

Item #: _____ Quantity: _____

Model #: _____

MODELS: **PMC3P200922**


PMC4P200928

PMC5P200935


**Walk-in cooler merchandiser. C-Stores -
Supermarket Refrigerators.**

PLAN VIEW


ELEVATION

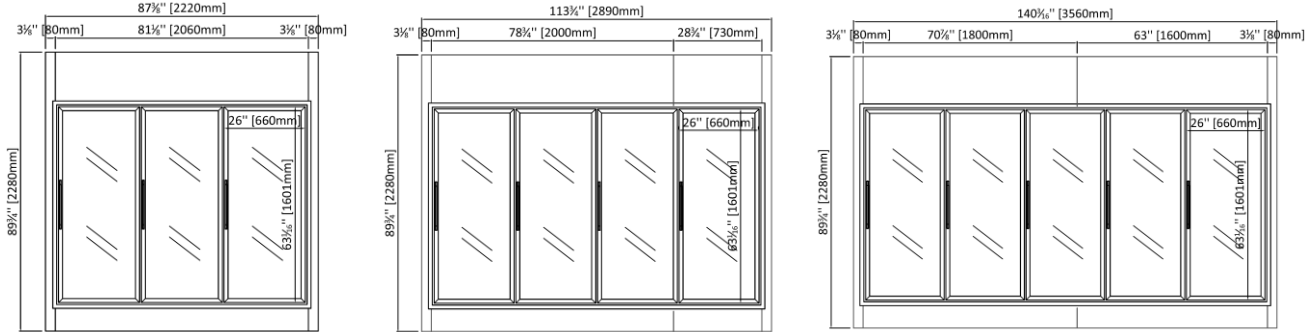

RIGHT VIEW

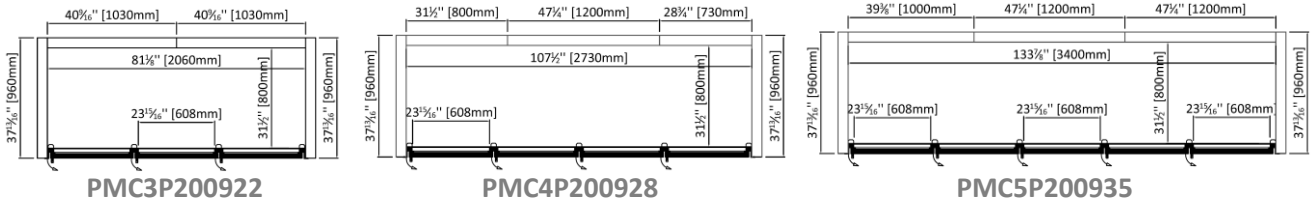

PLAN VIEW

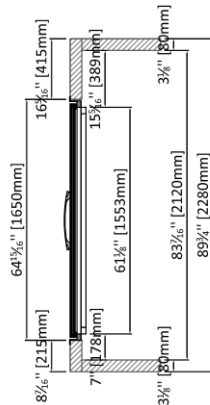

Revision: 01 Fecha: 11/09/2018 PMC3P200922, PMC4P200928, PMC5P200935_FT_62_1

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
1409 N.W. 84th Avenue
Doral, FL 33126
1.305.777.9599 Office
1.305.777.9598 Fax

www.infrico.us
sales@infrico.com

APPROVALS: _____

AVAILABLE AT: _____

Follow us: