

Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Model #: \_\_\_\_\_

MODELS: <b>PMC3N200922</b>	<b>PMC4N200928</b>	<b>PMC5N200935</b>	<b>Walk-in cooler merchandiser. C-Stores - Supermarket Freezers.</b>
----------------------------	--------------------	--------------------	--

### General Strengths

- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety).



MODELS	Dimensions (inches) (mm)			Nº Doors Glass	Nº Doors Solid	Capacity (Cu. Ft.) (L)	Temp. Range (°F) (°C)	Recommended Refrig. Capacity (BTU/h)	Cond. Unit. H.P.	Case Amps 115V.	Crated Weight* (Lbs.) (Kg.)
	W	D	H								
PMC3N200922	87-13/32 2220	37-3/4 960	89-11/16 2280	3	0	123,24 3490	0°F/-8°F -18°C/-22°C	9365	-	-	418 190
PMC4N200928	113-13/16 2890	37-3/4 960	89-11/16 2280	4	0	163,50 4630	0°F/-8°F -18°C/-22°C	12245	-	-	526 240
PMC5N200935	140-5/32 3560	37-3/4 960	89-11/16 2280	5	0	203,76 5770	0°F/-8°F -18°C/-22°C	13865	-	-	639 290

**NOTE: Recommended equipment refrigeration data**

\*The crated weight corresponds to the weight of the cabinet and the doors.

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODELS: <b>PMC3N200922</b>	<b>PMC4N200928</b>	<b>PMC5N200935</b>	<b>Walk-in cooler merchandiser. C-Stores - Supermarket Freezers.</b>
----------------------------	--------------------	--------------------	--

## CARACTERISTICAS ESTÁNDAR

### ■ Panels

- Sandwich panels composed of polyurethane core, CFC's free and injected at high pressure, with a density of 43-45 Kg / m<sup>3</sup>, between two sheets of galvanized steel.
- Thickness 80 mm,

### ■ Exterior and interior

- Galvanized steel (Z 225) with 25μ polyester coating with removable protection film, (white colour RAL 1006 and food grade according to directive 2001/62 / CE (August 9, 2001, amending Directive 90 / 128 / EEC)),
- Same exterior and interior covering, as well as floor and ceiling,

### ■ Dimensions

- Standard external height 2280 mm,
- Standard interior height 2120 mm,
- Width and length according to model,

### ■ Panel joining system

- Specially designed box to fix the panels in a fast and easy way, made of high resistance ABS plastic and galvanized steel hook,

### ■ Doors

- Silver anodized aluminum frame,
- Triple-pane glass tempered exterior glass, safe against possible breakage by impact,
- Magnetic door gasket to ensure tightness,
- Elements for lighting integrated in profiles,
- Fluorescent lighting (option LEDs),
- Door frame heaters to prevent external condensation,

### ■ Accessories

- Pressure compensation valve for negative temperatures,
- Food grade PVC sanitary radius on all interior edges to facilitate cleaning tasks,

### ■ Electrical

- Electrical connection: 115 V / 1 ph / 60 Hz

## OPTIONAL

- ☐ Led lighting in glass doors.



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

Model #: \_\_\_\_\_

MODELS: **PMC3N200922**




**PMC4N200928**

**PMC5N200935**


**Walk-in cooler merchandiser. C-Stores -  
Supermarket Freezers.**

## PLAN VIEW


## ELEVATION

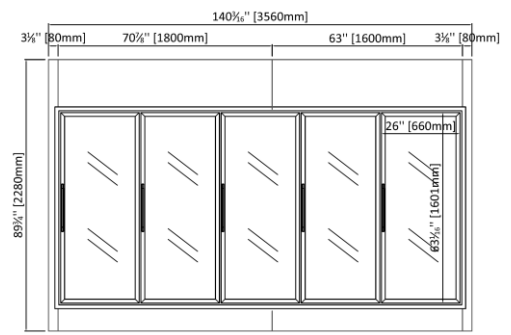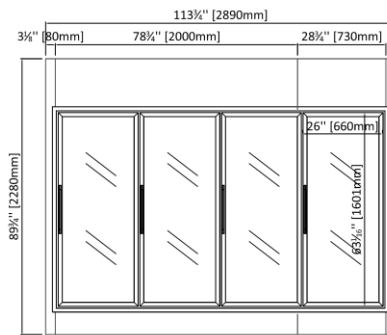


## RIGHT VIEW



**PMC3N00922**

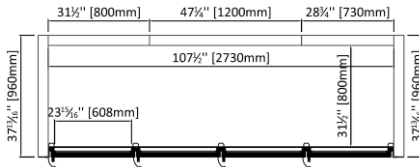


**PMC4N200928**

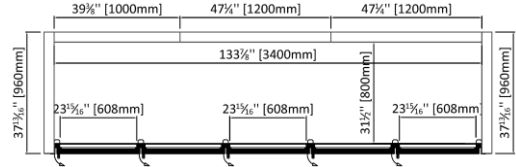

**PMC5N200935**

## PLAN VIEW

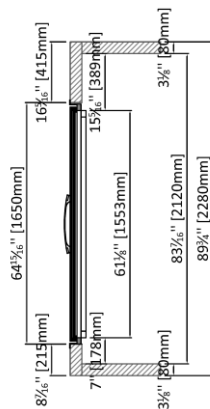

Revision: 01 Fecha: 07/18/2018 PMC3N200922, PMC4N200928, PMC5N200935\_FT\_62\_1

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



**Infrico USA Corp.**  
1409 N.W. 84th Avenue  
Doral, FL 33126  
1.305.777.9599 Office  
1.305.777.9598 Fax

[www.infrico.us](http://www.infrico.us)  
[sales@infrico.com](mailto:sales@infrico.com)

APPROVALS: \_\_\_\_\_

AVAILABLE AT: \_\_\_\_\_

Follow us: